



Attorney Docket No. Patent 003301-136

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

ALAN JACK et al.

Application No.: 10/823,749

Filing Date: April 14, 2004

Title: CORE BACK OF AN ELECTRICAL MACHINE AND METHOD FOR MAKING THE SAME

Group Art Unit: 2834

Examiner: Unassigned

Confirmation No.: 5073

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The benefit of the filing date of the following priority foreign application(s) in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed.

Country: Sweden

Patent Application No(s): 0301116-0

Filed: April 15, 2003

In support of this claim, enclosed is a certified copy(ies) of said foreign application(s). Said prior foreign application(s) is referred to in the oath or declaration and/or the Application Data Sheet. Acknowledgment of receipt of the certified copy(ies) is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

Date: August 9, 2004

By Benton S. Duffett, Jr.
Benton S. Duffett, Jr.
Registration No. 22,030

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Höganäs AB, Höganäs SE
Applicant (s)

(21) Patentansökningsnummer 0301116-0
Patent application number

(86) Ingivningsdatum 2003-04-15
Date of filing

Stockholm, 2004-08-04

För Patent- och registreringsverket
For the Patent- and Registration Office



Hjordis Segerlund

Avgift
Fee 170:-

BEST AVAILABLE COPY

CERTIFIED COPY OF
PRIORITY DOCUMENT

+46 42 329901

Ink. t. Patent- och reg.verket

2003-04-15

1

Huvudfaxen Kussion

CORE BACK OF AN ELECTRICAL MACHINE AND METHOD FOR
MAKING THE SAME

Technical Field of the Invention

The present invention is generally related to electrical machines and in particular to a core and the core back of an electrical machine. The present invention is also related to a method for making a core back of an electrical machine and a blank for making said core back.

Background of the Invention

The stator or the rotor of electrical machines generally comprises teeth and a core back. The function of the teeth is to lead magnetic flux induced in the teeth by a coil arranged round the teeth and, thus, the teeth increases the efficiency of the interaction between the stator and a rotor, in respect of a stator or a rotor having no teeth. The core back is arranged to magnetically connect the teeth to each other in order to provide a flux feedback loop having low reluctance, i.e. it may be seen as closing the magnetic circuit generating flux for interaction with a rotor.

The stator cores of electrical machines have generally been made of solid soft magnetic material, e.g. iron. One problem with these types of stator cores is that eddy currents are induced in the stator core. To reduce this problem with eddy currents the stator cores of today are made of sheets of soft magnetic material that is stacked together and electrically insulated from each other or of iron powder being electrically insulated.

In US 6 445 105 there is shown an axial flux machine having a core back made of laminations to which teeth of molded iron are attached and directed in an axial direction.

+46 42 329901

Ink. t. Patent- och rekordstat

2

2003-04-15

Huvudfaxen Korrans

Summary of the Invention

It is an object of the present invention to provide an improved core back.

5 This object is accomplished by means of a core back according to claim 1, by means of a method for making a core back according to claim 5, by means of a blank for making a core back according to claim 10. Preferred
10 embodiments of the invention are disclosed in the dependent claims.

In particular, according to one aspect of the invention, a core back for an electrical machine, said core back being essentially ring shaped, comprises:

15 a plurality of stacked, ring shaped sheets of soft magnetic material,

a barrier of electrical resistance arranged between two adjacent sheets of soft magnetic material for reducing effects of eddy currents,

20 wherein at least each sheet of soft magnetic material in a subset of said plurality of stacked, ring shaped sheets of soft magnetic material includes a plurality of circumferentially arranged tooth openings that are extending axially through each sheet in said
25 subset of said plurality of stacked, ring shaped sheets of soft magnetic material, additionally, each sheet of said subset of said plurality of stacked, ring shaped sheets of soft magnetic material includes a first inner closing portion and a second inner closing portion which
30 are arranged between each tooth opening and an inner perimeter of said ring shaped sheet of soft magnetic material, wherein each first inner closing portion is arranged to face a corresponding second inner closing portion.

35 According to another aspect of the invention, a method for making a core back for an electrical machine comprises the acts of:

forming, from a initial sheet of soft magnetic material, at least one blank comprising a longitudinal coupling strip, a plurality of protrusions extending essentially orthogonal from said coupling strip, wherein
5 each protrusion includes at least one tooth engagement portion and at least one inner closing portion, and bending the at least one blank in the plane of the blank moving said at least one inner closing portion of a protrusion towards an inner closing portion of an
10 adjacent protrusion.

According to yet another aspect of the invention, a blank for making a core back of an electrical machine comprises:

a longitudinal coupling strip, and
15 a plurality of essentially equidistantly arranged protrusions extending essentially orthogonal from said coupling strip, wherein each protrusion includes at least one tooth engagement portion and at least one inner closing portion.

20 By providing sheets of soft magnetic material with a first closing portion and a second closing portion at each tooth opening, which are defined by the tooth engaging portions, and making them face each other in the core back it is possible to make each ring shaped sheet
25 of soft magnetic material that is provided with tooth openings by bending a elongated sheet of soft magnetic material into a ring shape. Accordingly, the amount of waste material resulting from the forming of sheets of soft magnetic material, i.e. the blanks, from initial
30 sheets of soft magnetic material may be reduced.

Further, by bending the sheets of soft magnetic material to their final shape it becomes possible to clamp the teeth in between adjacent protrusions.

In the context of this invention ring shaped are not
35 to be limited to circular rings only, but are to include ring shapes such as, triangular rings, quadrangular rings, pentagonal rings, etc., as well.

In the context of the invention the axial direction is a direction essentially orthogonal to the plane of the ring shaped sheet of soft magnetic material.

5 A further scope of applicability of the present invention will become apparent from the detailed description given below. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various
10 changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

Brief Description of the Drawings

15 Other features and advantages of the present invention will become apparent from the following detailed description of a presently preferred embodiment, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic view of an axial flux
20 electrical machine that may be arranged according to the invention,

Fig. 2 is a schematic exploded diagram of the axial flux electrical machine of Fig. 1,

Fig. 3 is a schematic view of a core back according
25 to the invention,

Fig. 4 is a schematic view of a blank for making a core back according to Fig. 3, and

Fig. 5 is a schematic view of a blank according to Fig. 4, said blank is bent into a ring shaped sheet of
30 soft magnetic material that may be used to make an axial flux machine according to Fig. 1 or a core back according to Fig. 3.

Detailed Description of Embodiments

35 In Figs 1 and 2 there is shown stators 10a, 10b and a rotor 12 of an axial flux electrical machine having a double stator configuration. Accordingly, the axial flux

+46 42 329901

Ink. 1. Patent- och reg.verket

2003-04-15

5

Huvudfaxen Kasson

machine includes two essentially identical stators 10a, 10b.

Each stator of the axial flux machine of Fig. 1 includes a plurality of teeth 14 attached to a core back 16, also known as yoke, and each tooth 14 is provided with a coil 18. The teeth 14 are circumferentially and essentially equidistantly arranged to said core back 16. The number of teeth 14 in a stator 10 may vary depending on the application and/or required characteristics of the machine. Each coil 18 may be a single winding, i.e. one wire wound into a coil and connected to an electrical supply unit, not shown, or a distributed winding, i.e. each coil 18 includes wires that are connected to different outputs of the supply unit and may thereby carry electricity having differing electrical characteristics. A person skilled in the art of electrical motors know many different types of electrical supply units which may be utilized. The skilled person also knows how to connect a single winding or a distributed winding to such electrical supply units. Further, the coils 18 may be pre-wound prior to being positioned around the teeth. The teeth 14 provided with a coil 18 may be attached to the core back 10a, 10b and, thus, the coils 18 do not need to be wound onto teeth 14 already attached to a core back 10a, 10b. This arrangement also makes it possible to use bobbin wound coils 18.

The rotor 12 of the axial flux machine in Fig. 1 includes a plurality of permanent magnet sections 20 arranged circumferentially having their polarization vectors directed in an axial direction. Every other permanent magnet section 20 may have a polarization vector that is directed in the opposite direction in relation to the two neighboring permanent magnet sections 20. The number of permanent magnet sections may vary depending on the application and/or required characteristics of the machine. Further, the permanent

magnet sections 20 may be mounted onto some kind of support body, not shown.

An axial flux machine in which the present invention may be used may be an axial flux machine corresponding to the above described. However, it may also be an axial flux machine having a single stator configuration, an axial machine wherein the rotor includes a core back provided with teeth in accordance with the above description and wherein the stator includes permanent magnets, etc.

In Fig. 3 there is shown a core back 16 according to the invention. The core back 16 comprises a plurality of sheets 310 of soft magnetic material stacked onto each other. Further, there are tooth openings 312 in the core back for receiving the teeth, which are separate elements from the stator core 16, as shown in Figs 1-2. These tooth openings 312 may extent through the entire core back 16 or partially through the core back 16 in the axial direction.

The teeth that are to be attached to the core back 16, also see Figs 1 and 2, may be made of soft magnetic material provided with electrical resistance in order to reduce the appearance of eddy currents in the teeth. According to one embodiment the material used may be electrically insulated soft magnetic powder, soft magnetic powder presenting electrical resistance, or a moldable soft magnetic material presenting electrical resistance. When using electrically insulated soft magnetic powder, soft magnetic powder presenting electrical resistance, or a moldable soft magnetic material presenting electrical resistance, the manufactured stator parts, according to one embodiment, should present a resistivity of at least $1 \mu\Omega\text{m}$ in order to reduce the appearance of eddy currents satisfactorily. Another advantage of using electrically insulated soft magnetic powder, soft magnetic powder presenting electrical resistance, or a moldable soft magnetic

+46 42 329901

Ink. t. Patent- och Rättshuset

2003-04-15

Hovudfaxen Kassen

7

material presenting electrical resistance is that the teeth may be formed into almost any shape and that the teeth may provide three dimensional flux propagation, which may be desirable for some applications. Further, the shape of the teeth in an area where a coil is to be positioned may be formed so that the coil may bear against the teeth without risking to damage the insulation of the wires that form the coils.

In the core back 16 the magnetic flux propagates essentially circumferentially and, thus, inducing a current, i.e. eddy current, in the core back 16. In order to reduce the effect of eddy currents barrier of electrical resistance is arranged between adjacent sheets. This barrier may be achieved by providing a separate sheet of electrically insulating material between adjacent sheets 310 of soft magnetic material or by using sheets of soft magnetic material that are provided with a thin layer of insulation or other resistive compounds.

From each tooth opening to the inner perimeter 316 of each sheet 312 of soft magnetic material there is a dividing line 314, hereinafter called inner dividing line 314, which is a result of each sheet 310 of soft magnetic material being divided along this line. At one side of the inner dividing line 314 the portion between the tooth opening 312 and the inner perimeter 316 is called first closing portion 318 and on the other side of the inner dividing line 314 the area between the tooth opening 312 and the inner perimeter 316 is called second closing portion 320. The first and second closing portions 318 and 320 are arranged facing each other, thus, resulting in the inner dividing line 314.

Further, in the area between each tooth and the outer perimeter 322 there may be arranged another divisional line 324, hereinafter called outer dividing line 324.

One possible benefit of arranging the core back in this way is that the amount of waste material from making the core back 16 may be reduced. Below, one possible method for making a core back reducing the amount of waste material is presented.

In Fig.4 a blank 410 for one sheet 310 of soft magnetic material used when making said core back according to one embodiment is showed. The blank 410 may be cut out, punched out, or formed by means of other known methods from an initial sheet of soft magnetic material, not shown.

The resulting blank 410 may include an elongated continuous run of soft magnetic material extending along a first longitudinal essentially linear side 412 of said blank 410, i.e. from a first end portion 414 to a second end portion 416 of the blank, this continuous run is hereinafter called coupling strip 418. Along the coupling strip 418 a plurality of essentially equidistant protrusions 420 extends essentially perpendicular to said first longitudinal side 412. According to the embodiment shown in Fig. 4, the number of protrusions 420 correspond to the number of desired tooth openings in the finished core back. However, this is a result of the end portions 414, 416 of the blank being full size protrusions, if the end portions is partial protrusions the number of protrusions may need to be increased by one.

Each full size protrusion 420 includes a first inner closing portion 422, a first tooth engaging portion 424, a first outer closing portion 426, a second inner closing portion 428, a second tooth engaging portion 430, and a second outer closing portion 432. Said first and second inner closing portions 422, 428 are included in a top portion 434 of the protrusion 420.

The first and second tooth engaging portions 423 and 430 may be arc shaped in order to be provide a close fit around a tooth having a rounded cross section. However,

they may have any other shape as long as the connection between teeth and core back 16 is enable to transfer magnetic flux without unacceptable losses in flux. The top portion may be shaped essentially as a truncated triangle, in which the first and second inner closing portions 422 and 428 each form one of the tapering edges of said truncated triangle. The angle α of the tapering edge of the first and second inner closing portions 422 and 428 depends on the number of tooth openings in the resulting ring shaped core back and, thus, also the number of teeth in the final core. The angle is measured between an imaginary line being orthogonal to said first longitudinal side 412 of the blank 410 and the tapering edge of the first or the second inner closing portions 422, 428.

The first and second outer closing portions 426, 432 are defining a small slot which is arranged to facilitate the bending of the blank 410. The first and second outer closing portions 426, 432 may not be necessary if the bending may be accomplished without them. Regardless of outer closing portions or not, the geometrical properties and/or the properties of the soft magnetic material of the blank are to result in a blank 410, i.e. a formed sheet of soft magnetic material, that is flexible in a direction within the plane of the blank 410.

When the blank has been formed then the blank 410 is bent in the plane of the blank 410 into a ring shape so that the first and second end portions 414, 416 are facing each other, see Fig. 5. During the bending the first and second inner closing portions 422 and 428 of two adjacent protrusions 420 are moved towards each other, and when the blank 410 has been bent enough each first inner closing portion 422 is facing a second inner closing portion 428 resulting in the inner dividing line 440 as shown in Fig. 5 and in Fig. 3. The first and second inner closing portions 422, 428 may be arranged in

+46 42 329901

Ink. t. Patent- och reg.verket

2003-04-15

10

Huvudfaxen Kassan

close contact to each other in order to provide a low reluctance path for the flux over the dividing line 440.

However, in some applications it may be sufficient to have a low reluctance path via a tooth arranged in said tooth opening. In such case the first and second inner closing portions 422, 428 may not necessarily be arranged in close contact with each other, they may even not be in contact with each other at all. According to one embodiment the tolerances of the protrusions 420 may be dimensioned in such a way that the bending of the blank results in that the teeth that are to be attached to the core back are clamped by the first and second tooth engagement portions 424, 430 of two adjacent protrusions 420. This may be accomplished by designing the tooth engagement portions 424, 430 so that they are defining a tooth opening that is marginally smaller in a circumferential direction than the width of the teeth, thus the teeth is clamped when the teeth is mounted and the blanks 410 is bent.

The first end portion 414 of the bent blank 410, forming the ring shaped sheet of soft magnetic material, may be attached to the second end portion 416. They may be attached to each other by means of soldering, welding, gluing or any other way known to a person skilled in the art.

Now referring to Fig. 3, in order to make a core back according to one aspect of the invention a plurality of ring shaped sheets 310 of soft magnetic material that have been processed as the one described above is stacked on top of each other. As mentioned earlier, the sheets 310 of soft magnetic material either includes an electrically insulating layer or there is provided insulation between the different sheets 310. The core back may then be provided with teeth and coils. According to one embodiment the teeth are provided with coils and then the teeth are attached to the core back, as shown in

Fig 2 wherein a coil 18 is arranged on a tooth 14 and then the tooth 14 is attached to the core back 10a, 10b.

According to another aspect of the invention, the plurality of blanks are formed from a stack of initial
5 sheets of soft magnetic material, i.e. a plurality of blanks in a stack are produced simultaneously.

According to yet another aspect of the invention, independently of whether the blanks are formed from a stack of initial sheets of soft magnetic material or from
10 single initial sheets of soft magnetic material, teeth and coils may be arranged in the tooth openings of a stack of processed sheets of soft magnetic material that have not yet been bent, i.e. blanks. Then the stack of sheets of soft magnetic material is bent to a complete
15 ring shaped stator or rotor. When using this embodiment the teeth may be clamped by the first and second tooth engaging portions of the sheet of soft magnetic material.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
21

CLAIMS

1. Core back for an electrical machine, said core
5 back being essentially ring shaped and comprising:
a plurality of stacked, ring shaped sheets of soft
magnetic material,
a barrier of electrical resistance arranged between
two adjacent sheets of soft magnetic material for
10 reducing effects of eddy currents,
wherein at least each sheet of soft magnetic
material in a subset of said plurality of stacked, ring
shaped sheets of soft magnetic material includes a
plurality of circumferentially arranged tooth openings
15 that are extending axially through each sheet in said
subset of said plurality of stacked, ring shaped sheets
of soft magnetic material,
additionally, each sheet of said subset of said
plurality of stacked, ring shaped sheets of soft magnetic
20 material includes a first inner closing portion and a
second inner closing portion which are arranged between
each tooth opening and an inner perimeter of said ring
shaped sheet of soft magnetic material, wherein each
first inner closing portion is arranged to face a
25 corresponding second inner closing portion.
2. Core back according to claim 1, wherein each
sheet of soft magnetic material comprised in said subset
of said plurality of stacked, ring shaped sheets of soft
magnetic material further includes a first end portion
30 and a second end portion which are facing each other.
3. Core back according to claim 2, wherein said
first end portion and said second end portion are
attached to each other.
4. Core according to any one of claims 1-3, wherein
35 said subset of said plurality of stacked, ring shaped
sheets of soft magnetic material include all ring shaped
sheets of soft magnetic material in the core back.

5. Method for making a core back for an electrical machine, said method comprising the acts of:

forming, from a initial sheet of soft magnetic material, at least one blank comprising a longitudinal coupling strip, a plurality of protrusions extending essentially orthogonal from said coupling strip, wherein each protrusion includes at least one tooth engagement portion and at least one inner closing portion, and

bending the at least one blank in the plane of the blank moving said at least one inner closing portion of a protrusion towards an inner closing portion of an adjacent protrusion.

6. Method for making a core back according to claim 5, further comprising the act of attaching a first end portion of said elongated sheet of soft magnetic material to a second end portion of said elongated sheet of soft magnetic material after said act of bending.

7. Method for making a core back according to any one of claims 5-6, further comprising the act of stacking a plurality of sheets of soft magnetic material after said plurality of sheets have been provided with openings and bent.

8. Method for making a core back according to any one of claims 5-6, further comprising the act of stacking a plurality of sheets of soft magnetic material after said plurality of sheets have been provided with openings.

9. Method for making a core back according to any one of claims 5-6, further comprising the act of stacking a plurality of initial sheets of soft magnetic material before said plurality of sheets have been provided with openings and bent and then performing the act of forming essentially simultaneously for all stacked initial sheets of soft magnetic material.

10. Blank for making a core back of an electrical machine, said blank comprising:

a longitudinal coupling strip, and

+46 42 329901

Ink. t. Patent- och näringslivet

2003-04-15

14

Huvudföreläsningen

a plurality of essentially equidistantly arranged protrusions extending essentially orthogonal from said coupling strip, wherein each protrusion includes at least one tooth engagement portion and at least one inner

5 closing portion.

11. Blank according to claim 10, wherein at least one of said plurality of protrusions includes a top portion essentially forming a truncated triangle of which the tapering sides is formed by a first and a second

10 inner closing portion.

12. Blank according to any one of claims 10-11, wherein said longitudinal coupling strip is essentially linear.

15

20


9
4
4
4
8
8

ABSTRACT

An essentially ring shaped core back for an
5 electrical machine comprising a plurality of stacked,
ring shaped sheets of soft magnetic material, a barrier
of electrical resistance arranged between two adjacent
sheets of soft magnetic material for reducing effects of
10 eddy currents. At least each sheet of soft magnetic
material in a subset of said plurality of stacked, ring
shaped sheets of soft magnetic material includes a
plurality of circumferentially arranged tooth openings
that are extending axially through each sheet in said
15 subset of said plurality of stacked, ring shaped sheets
of soft magnetic material, additionally, each sheet of
said subset of said plurality of stacked, ring shaped
sheets of soft magnetic material includes a first inner
closing portion and a second inner closing portion that
20 are arranged between each tooth opening and an inner
perimeter of said ring shaped sheet of soft magnetic
material. Each first inner closing portion is arranged to
face a corresponding second inner closing portion.

25

Elected for publication: Fig. 4



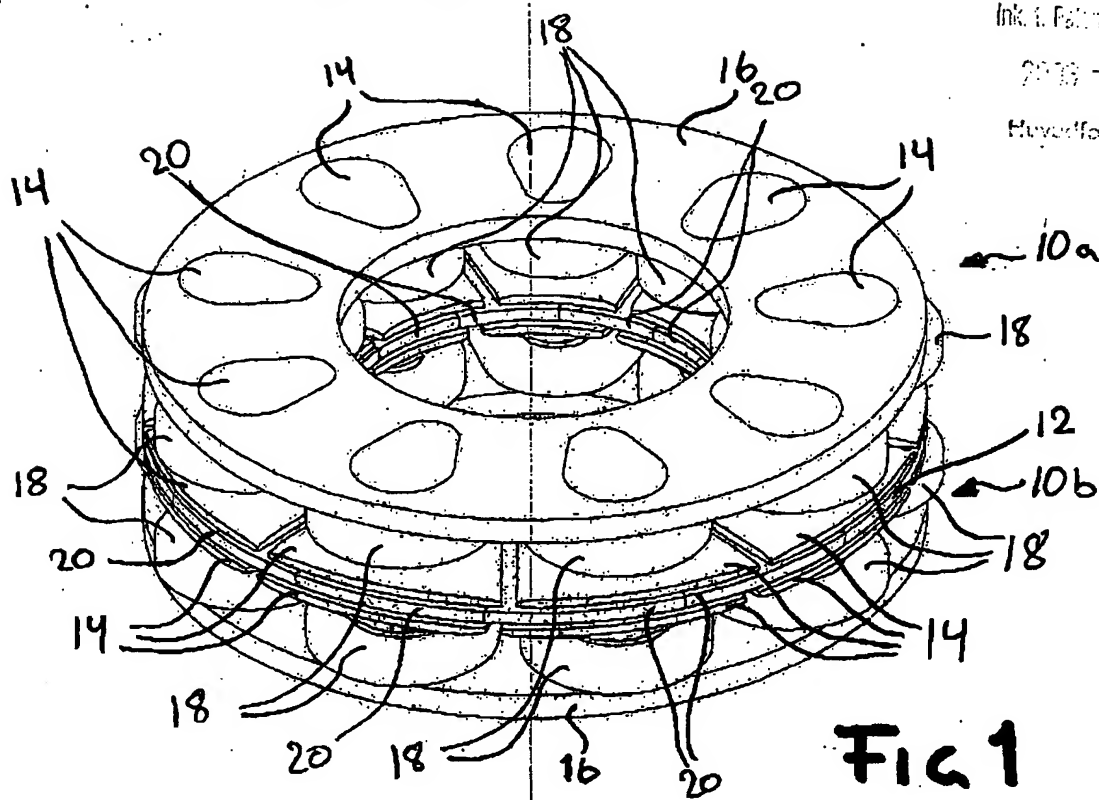


Fig 1

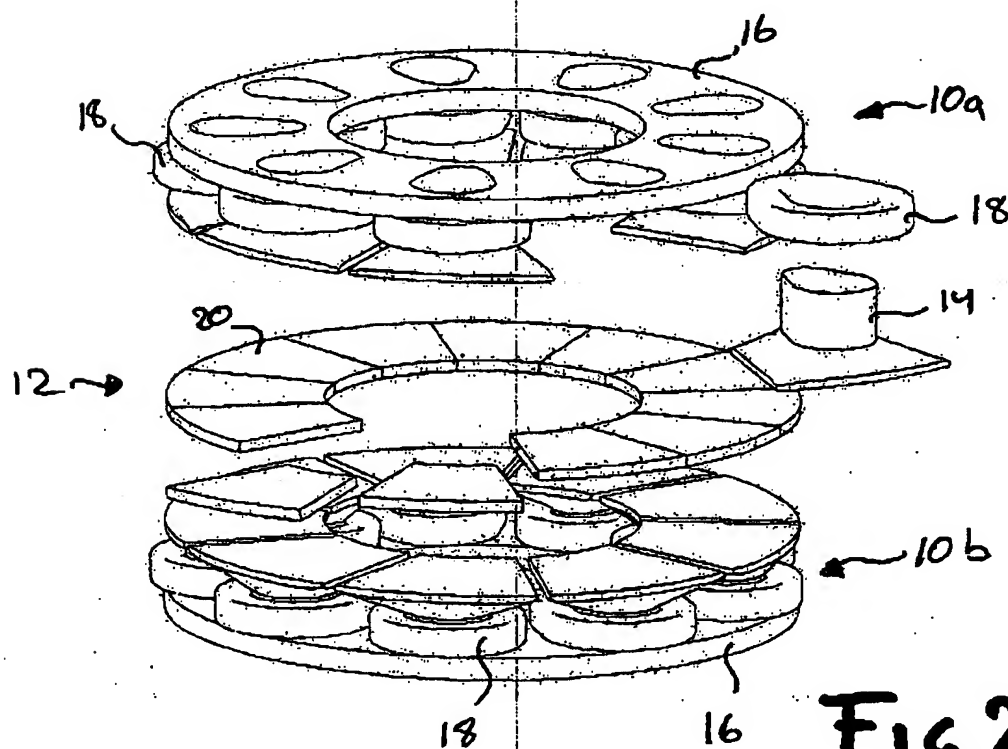


Fig 2

Ink. t. Patent- och reg.verket

2003-04-15

Huvudfaxen Kasse


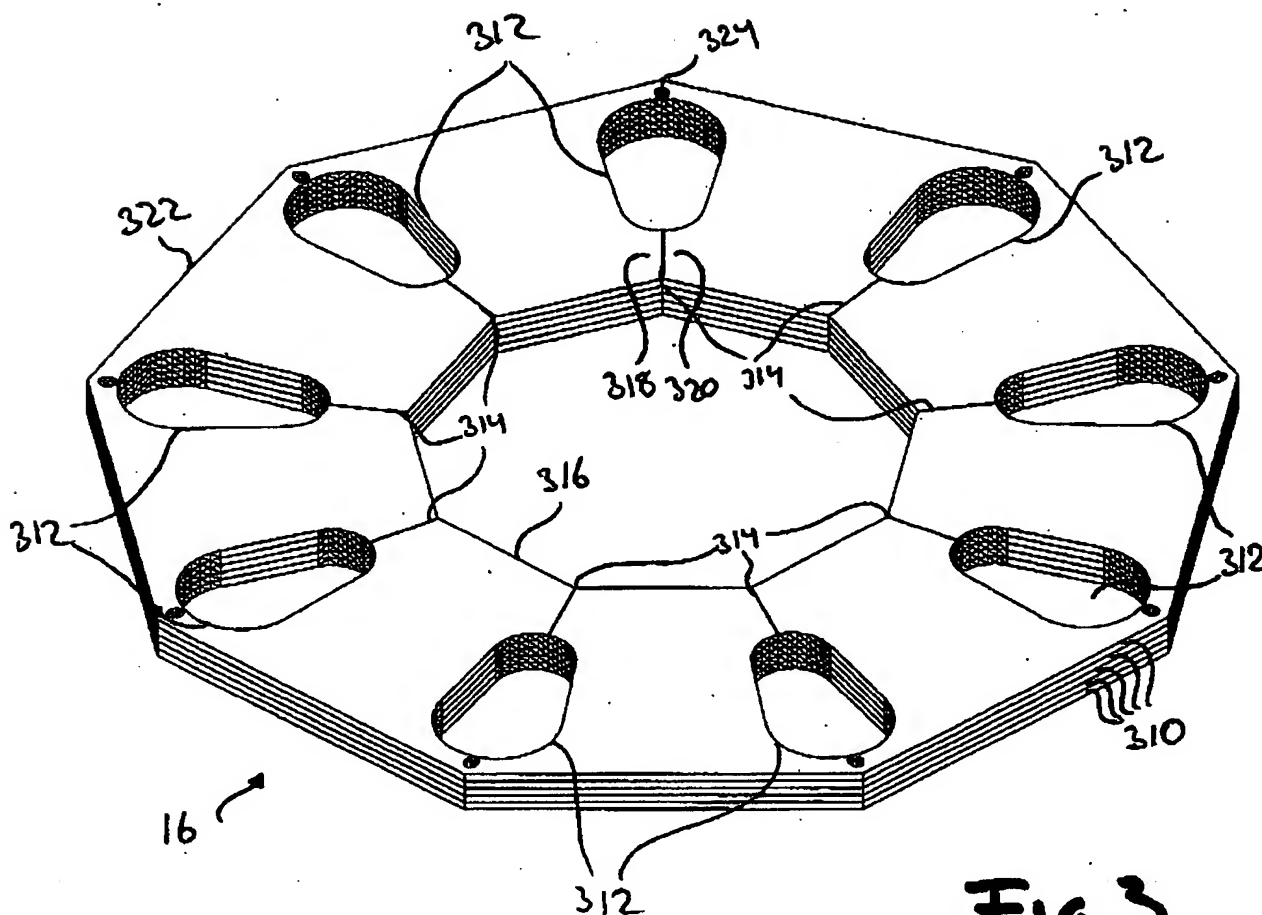


FIG 3

03041503


Fig 4

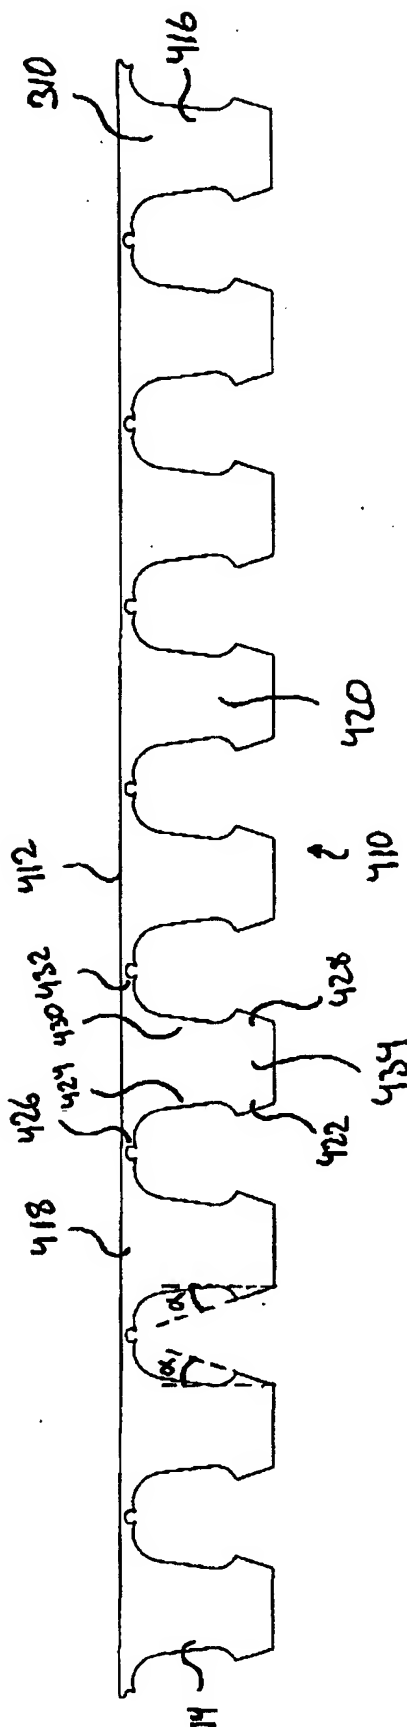

Ink. t. Patent- och reg. verket

2003-04-15

Huvudkontor: Kungälv

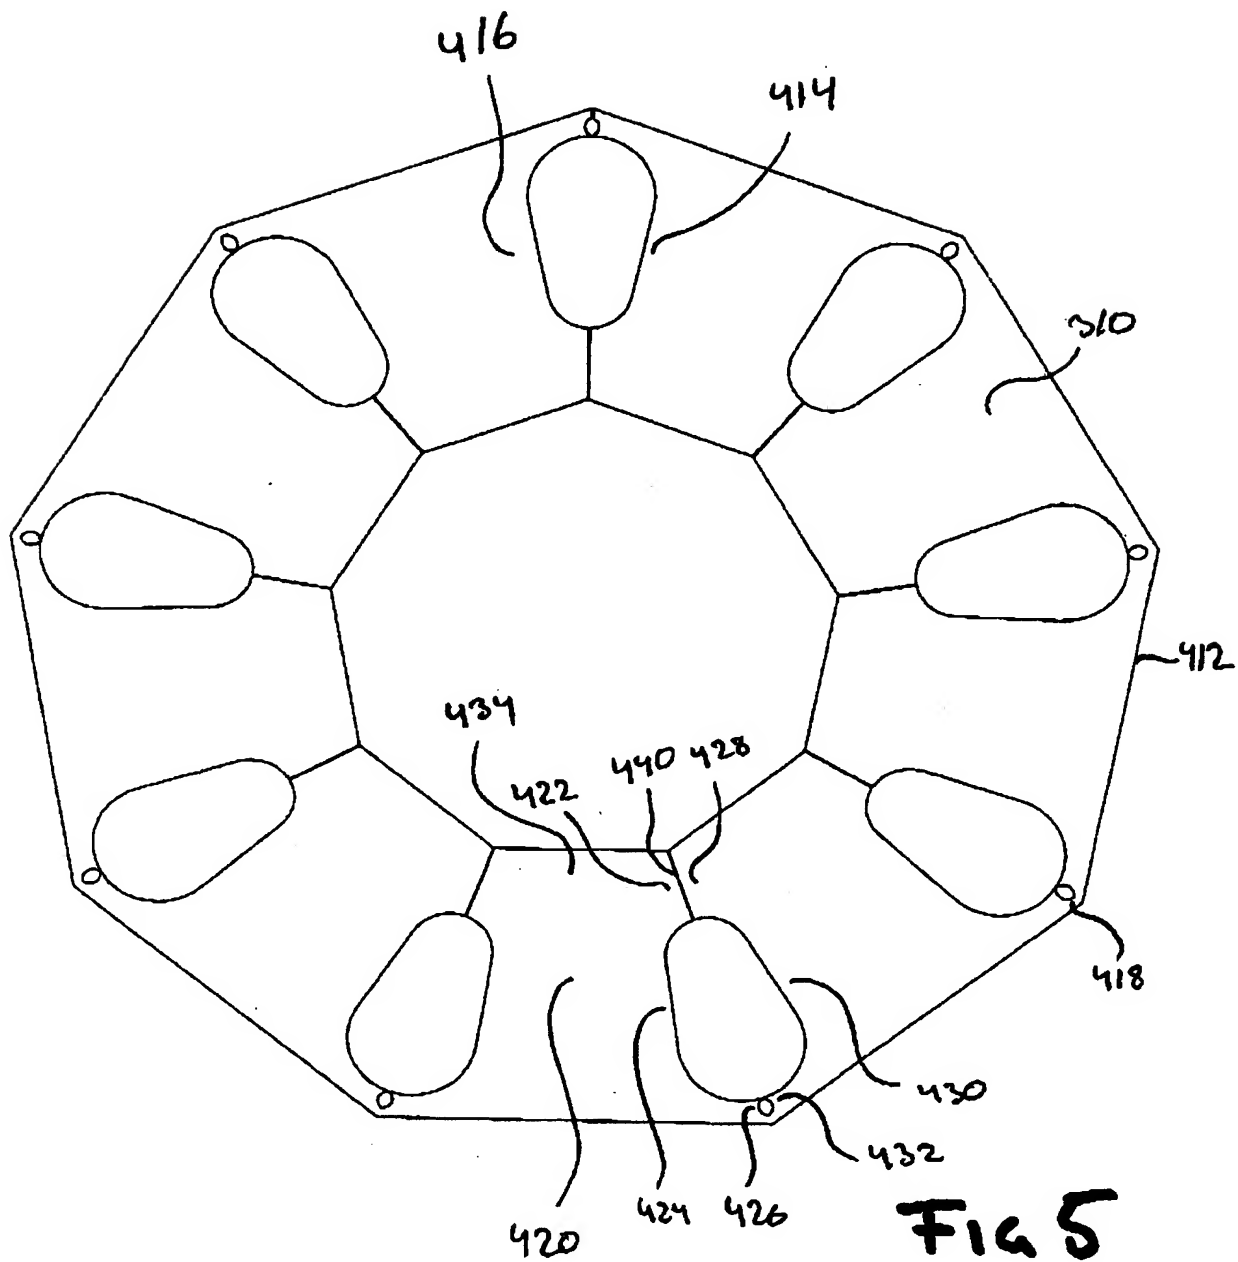**FIG 5**

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.